

3P Attenuation and Infiltration Filter



Item #1000630



Rainwater filters with locking lid and integrated dirt retention basket for installation in chambers or in turrets of a rainwater tank. The dirt basket made of stainless steel can be removed easily with the removal handle. Ideal for systems which use the cleaned water where the rainwater is to be infiltrated to ground. The two upper connections can be used as inlets, or one can be used as an emergency overflow. Either the lower side connection or the bottom connection can be used as the outlet to the storage tank.

The cleaned water can be used in washing machines, toilet flushing and garden watering, in homes, in commerce, in public buildings and in industry.

- All stainless steel basket
- Food grade high quality polyethylene construction
- Easy maintenance, just empty the basket as needed
- Accepts high volume of water flow

Low maintenance, depending on the contamination.

Housing material: Food Quality Polyethylene

For roof areas up to 2293 sqft.

All connections 4 inch.







Height difference of 0 mm between rainwater inlet and wastewater outlet.

Material filter cartridge: Stainless steel 1.4301

Mesh Size: .07 x 1.7 mm 650 Micron

Weight: 17.63 lbs.

Dimensions In Inches: H20.28 W15.35 D15.35
Weight: 23

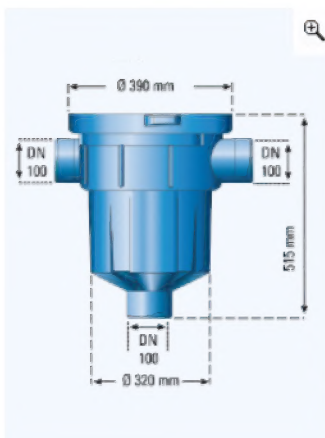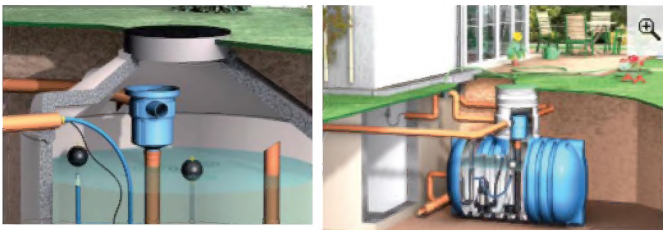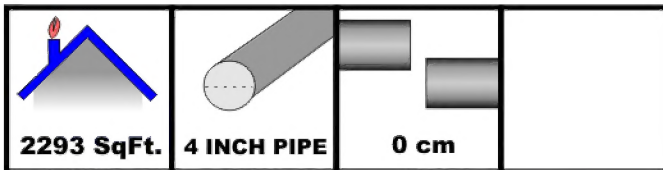

With Additional Filter